

C SERIES

LINEAR GAS FIREPLACES



enviro.com



Ledgestone Liner – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Black Enameled Liner – Ultra High Definition Log Set





Ledgestone Liner – Bezel Base



Fluted Liner – Bezel Base



Black Enameled Liner – Bezel Base



Ledgestone Liner – Bezel Base



Fluted Liner – Bezel Base



Black Enameled Liner – Bezel Base with Rock Set



Ledgestone Liner – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Black Enameled Liner – Ultra High Definition Log Set





Ledge stone Liner – Full Glass Tray



Fluted Liner – Full Glass Tray



Black Enameled Liner – Full Glass Tray



Ledgestone Liner – Bezel Base



Fluted Liner – Bezel Base



Black Enameled Liner – Bezel Base





Ledgestone Liner – Full Glass Tray



Fluted Liner – Full Glass Tray



Black Enameled Liner – Full Glass Tray





Ledgestone – Ultra High Definition Log Set



Fluted Liner – Ultra High Definition Log Set



Black Enameled Liner – Ultra High Definition Log Set


Specifications

	C34			C44			C60			C72		
BTU Maximum Input - NG / LP	30,000 BTU's			38,000 BTU's			51,000 BTU's			55,000 BTU's		
BTU Minimum Output* - NG / LP	9,750 BTU's			12,255 BTU's			16,702 BTU's			22,500 BTU's		
Turn Down - Valve 820 / Valve 885	Up to 50%			Up to 50%			Up to 50%			Up to 33 %		
FE Efficiency **	64.6%			64.5%			65.7%			61.16%		
Valve Configuration	Standing Pilot & IPI			Standing Pilot & IPI			Standing Pilot & IPI			IPI		
Venting	5" / 8"			5" / 8"			5" / 8"			5" / 8"		
Flex Venting	Up to 10'			Up to 10'			Up to 10'			10'		
Glass Size	HEIGHT	WIDTH		HEIGHT	WIDTH		HEIGHT	WIDTH		HEIGHT	WIDTH	
	14"	34½"		14"	44½"		14"	60½"		14"	72½"	
Visible Dimensions	16⅝"	36⅝"		16¼"	46⅝"		16⅝"	62⅛"		16⅝"	74⅛"	
Minimum Framing Dimensions †	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH
	65"	45"	20"	65"	55"	20"	72"	71"	20"	84"	83"	20"

* Calculated by (Max BTU Input) × 50% (Turn Down Valve) × (FE Efficiency) | ** Based on the measured P.4-15 rating of the IPI model. | † Please refer to owners manual for detailed installation instructions.


Power Vent Kit

- A minimum venting run of 10 feet
- A maximum venting run of 110 feet
- Max of 6 elbows in vent configuration
- Venting can run downward 4' below the unit
- Flush mount (paintable) termination
- Run Quiet Fan System (noise reduction)

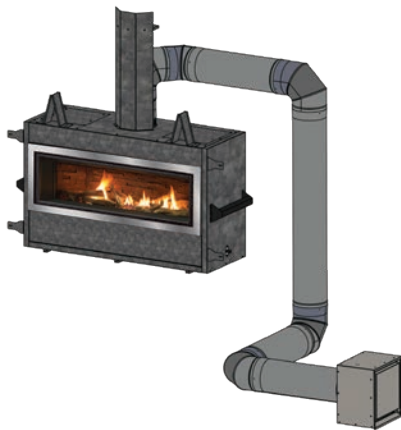


Cool Surface System HDK

In the past, wall mounted televisions or treasured decor pieces would degrade over time from the excess rising heat produced by your gas fireplace. Our new **Cool Surface System** for the C Series allows you to make use of the valuable real estate directly above your linear gas fireplace. It can channel heat inside the wall and vent it out above the fireplace.

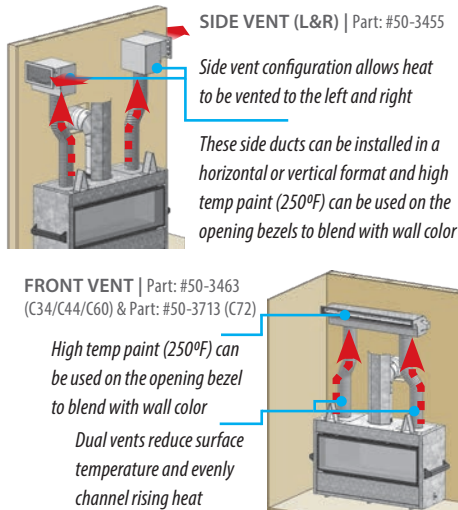

Ultra High Definition Log Set

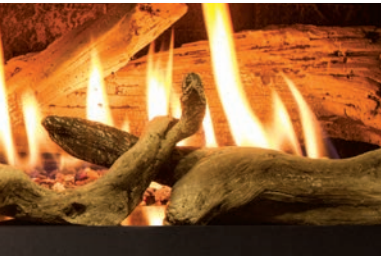

Compatible with the C34, C44, C60, and C72

Traditional Log Set



Compatible with the C44

Bezel Base



Includes Vermiculite
Compatible with the C34, C44, C60, and C72

Full Glass Tray



Compatible with the C34, C44, C60, and C72

Rock & Log Set



Compatible with the C44

Rock Set



Compatible with the C44

Halogen Light Kit



Compatible with the C34, C44, and C60

Iron Spheres Kit



Compatible with the C34, C44, C60, and C72

Fluted Liner




Compatible with the C34, C44, C60, and C72

Ledgestone Liner



Compatible with the C34, C44, C60, and C72

Black Enameled Liner

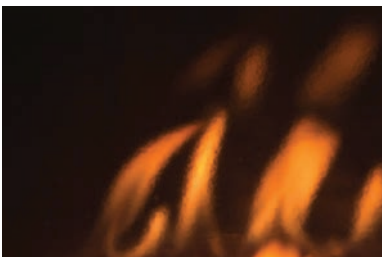

Compatible with the C34, C44, C60, and C72


Optional Surrounds



Brushed Nickel • Brushed Antique Copper
Brushed Black Nickel • Powder Coated Borderview

Note: The C72 Borderview Surround is only available in Brushed Nickel and Powder Coated

The best way to visualize your
dream fireplace at home
is with the Enviro App!



Manufactured by Sherwood Industries Ltd. Victoria, BC, Canada | enviro.com

Printed in Canada, April 2019

